


# AQUARIUM CONTROL UNIT FOR SUPER SPYBALL

## Model SS-AQU

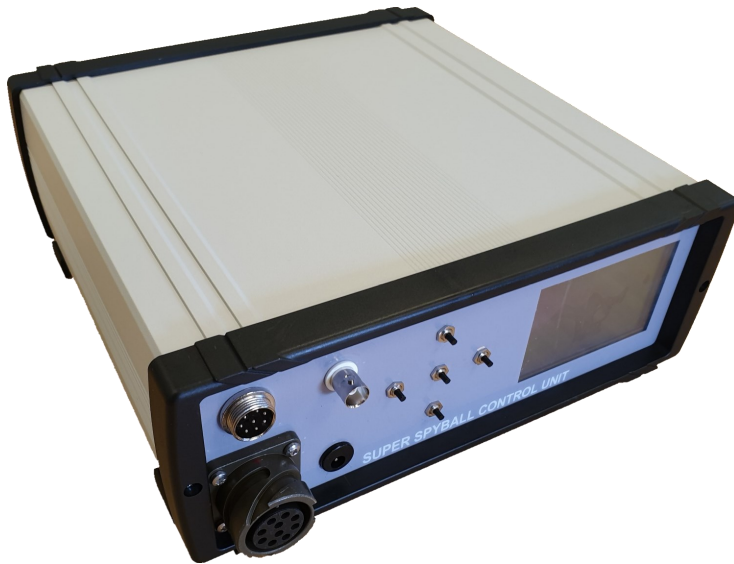

This unit provides all connections required for operation of a Submertec Super Spyball in a public aquarium environment.

Mounting should be arranged to be accessible to the aquarist but hidden from public view.

Video output is an HD-TVI signal which can be displayed directly on suitable monitors or converted to HDMI as required.

Connections can be supplied for use with a proportional Pan & Tilt joystick or paddle switches. These are not included.

The built in display and control buttons are used to setup the Spyball to suit the installation. This includes:



- Pan & Tilt Speed (when used with paddle switches)
- Zoom Speed
- Zoom Timeout — Automatic zoom wide after a set period of inactivity
- Set Tilt Limits
- Set Pan Limits
- Set Control direction to suit mounting orientation



Model SS-AQU SPECIFICATION	
Dimensions	250mm x 95mm x 260mm
Weight	2.4Kg
Video Output	HD-TVI
Control Connection	8 Pin Connector for P&T, Zoom
Power Required	24vdc / 40W
Power Supply	External AC-DC converter supplied

Spyballs are available in a number of configurations and with control options to suit a range of tasks from inspection to aquaculture – please visit our web site at [www.submertec.co.uk](http://www.submertec.co.uk) to view these together with other Submertec products.